

SINGLE PHASE EI TRANSFORMERS 6VA-32VA

ADVANTAGES

SK Electric designs and manufactures a broad range of transformers, reactors and inductors, these include an extensive line of standard products, as well as custom-built products.

We strive to make the most consistent and reliable power supplies in the world, driven by the following key principles;

- Diverse engineering capability.
- Stringent quality control.
- Highly skilled production staff.
- Control throughout our supply chain.
- Compliance with the highest international quality standards.
- Global customer support.
- Stringent intellectual property management practices.

These principles allow us to meet and exceed customers' requests whilst maintaining a competitive cost structure.

Our quality control includes 100% final testing to meet all required international industry standards and statistical process controls.

We lead in the development of methods to meet UL and TUV safety specifications. We have developed effective state of the art design and manufacturing techniques for high-volume self-supporting coils, high frequency high voltage transformers, EI transformers, toroidal transformers, reactors and many other power solutions.

Whether you require a standard, off-the-shelf unit, or one customized unit to fit your exacting requirements, SK Electric expert sales and engineering staff will work closely with you to meet your needs.


SK Electric has become synonymous with, on-time delivery, and uncompromised quality, which is the reason we have been nominated by our suppliers numerous times as their best global supplier.

APPLICATIONS

- Medical
- Transport
- Industrial equipment
- Renewable energy
- Defence
- Consumer electronics
- Power supplies

STANDARDS

- UL/IEC/EN 60601-1
- UL/IEC/EN 61558-1
- UL 1411

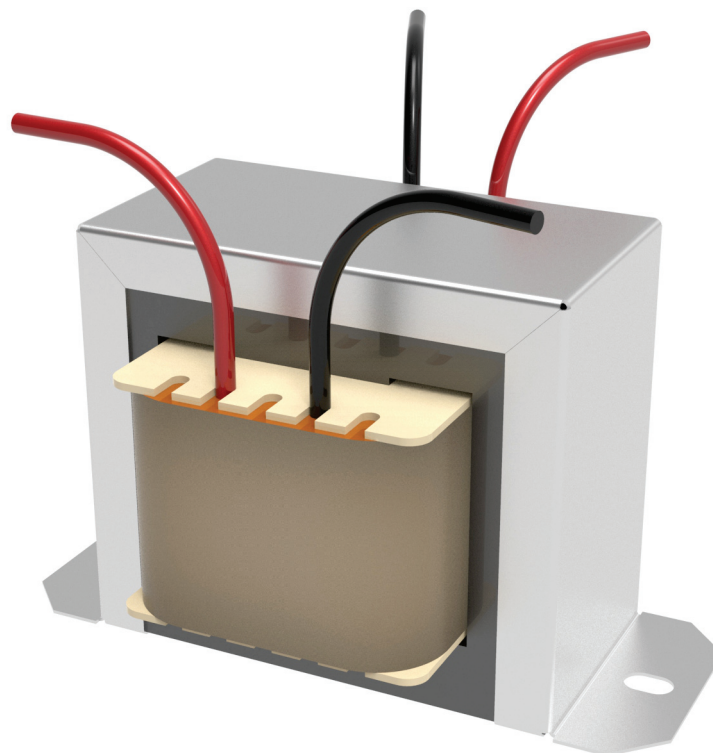

SK Electric

SINGLE PHASE EI TRANSFORMERS 6VA-32VA

Technical Specifications:

Rated Power: 6VA to 32VA

Rated frequency: 50/60Hz

Insulation class: Class B

Protection class: IP00

Cooling method: Natural air

Operating temperature : 0 °C - 40 °C

HV test: 3,000Vrms Hipot

Elevation above sea level: 3,000m Max

Not all customers have the same requirements, so here at SK Electric we work with you to develop a solution that best meets your needs. We covers all aspects from, standards and certifications to, specific input and output requirements, labelling, mounting options, packaging etc.

We can supply standalone transformers, or incorporate additional components, assemble subassemblies and manufacture complete finished products. All manufactured and tested to your specifications.

Model	Power VA	(H) (ALL DIMENSIONS IN MM)	(W)	(D)	WEIGHT (KG)
DG-6	6	43	70.5	42	0.45
DG-10	10		73	49	0.6
DG-15	15	51	80	61	1
DG-20	20		87	66	1.1
DG-25	25	58	97	61	1.25
DG-32	32		94	64	1.5

